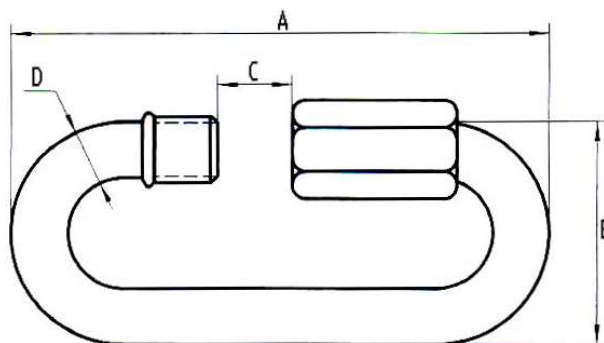


44IM**MAGLIE RAPIDE COMMERCIALI ZINCATE
COMMERCIAL QUICK LINKS GALVANIZED**

D	A	B	C	WLL	BL			
3,5	36	17	5	0,015	4	8,2	440103C	300
4	39,5	19	5,5	0,025	4	11	440104C	200
5	48	23	6,5	0,050	4	20	440105C	100
6	57	26	7,5	0,075	4	34	440106C	50
7	66	30	8	0,100	4	55	440107C	50
8	76	34	10	0,125	4	77	440108C	30
9	83	37	11	0,165	4	110	440109C	25
10	89	40	12	0,200	4	160	440110C	20
12	107	49	15	0,275	4	232	440112C	10
14	121	54	17	0,400	4	355	440114C	5
16	140	61	19	0,525	4	518	440116C	5

MAGLIE COMMERCIALI NON ADATTE AL SOLLEVAMENTO**WLL:** (working load limit) carico di lavoro in tons**BL:** coefficiente di sicurezza**CARICHI E COEFFICIENTI SONO DA CONSIDERARSI PURAMENTE INDICATIVI
E NON VINCOLANTI** peso cadauno in grammi**Materiale:**acciaio C15**Zincatura:** FeZn5c1A Cr III dir. RoHS